

MODE D'EMPLOI INSTALLATION INSTRUCTIONS BEDIENUNGSANLEITUNG

ADD1248_NTALL
vB_210408

ALIMENTATIONS MODULAIRES SUR RAIL DIN
DIN RAIL MODULAR POWER SUPPLIES
MODULARE STROMVERSORGUNGEN
FÜR DIN HUTSCHIENENMONTAGE




12V / 24V DC



ADD1248 - ADD2448



						nombre de modules number of modules Teilungseinheiten
ADD1248	93,80 x 54 x 65,80 mm	220 - 240V AC 50/60 Hz 0,8 A	12 V DC + 15 %	5 A	60 W	3
ADD2448			24 V DC + 15 %	2,5 A		
 IP 20  2,5 mm² max  0,189 kg  -10 / +50°C  LED V OUT OK						
Protection PTC contre les surtensions et les courts-circuits Short circuit and overload PTC proof PTC Schutz gegen Überspannung und Kurzschluss			Isolation : classe II - Insulation: Class II - Isolationsklasse II 			

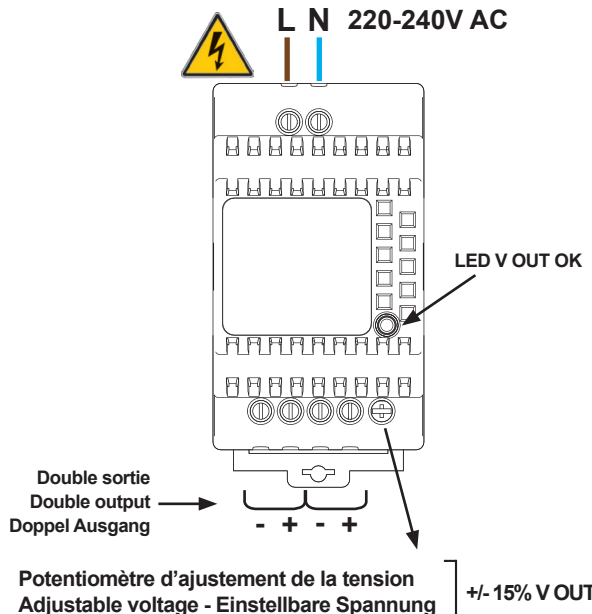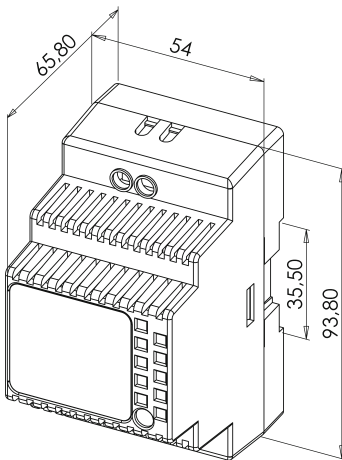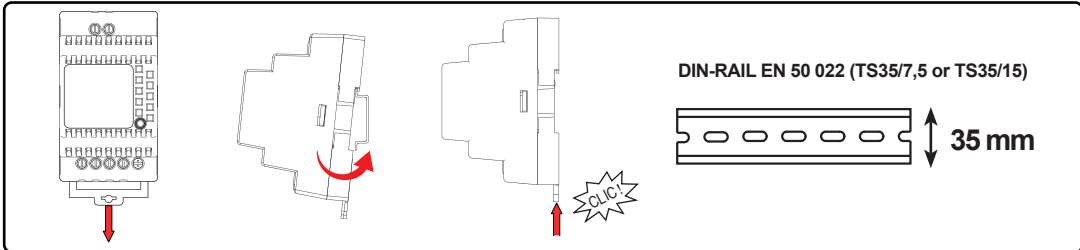

+/- 15% V OUT

